
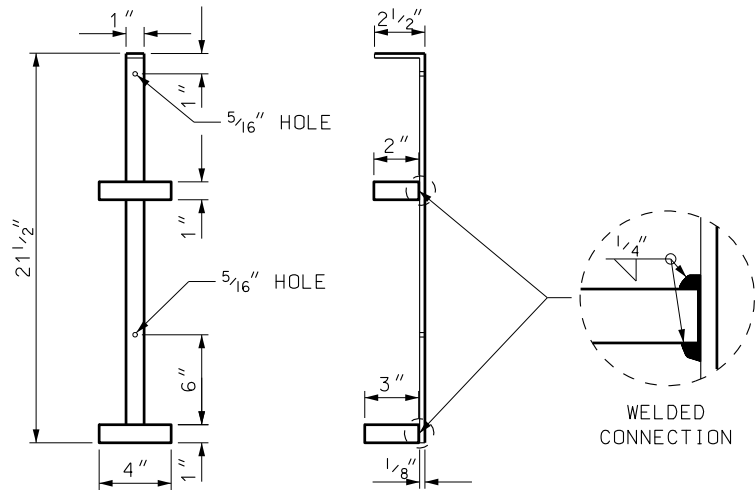
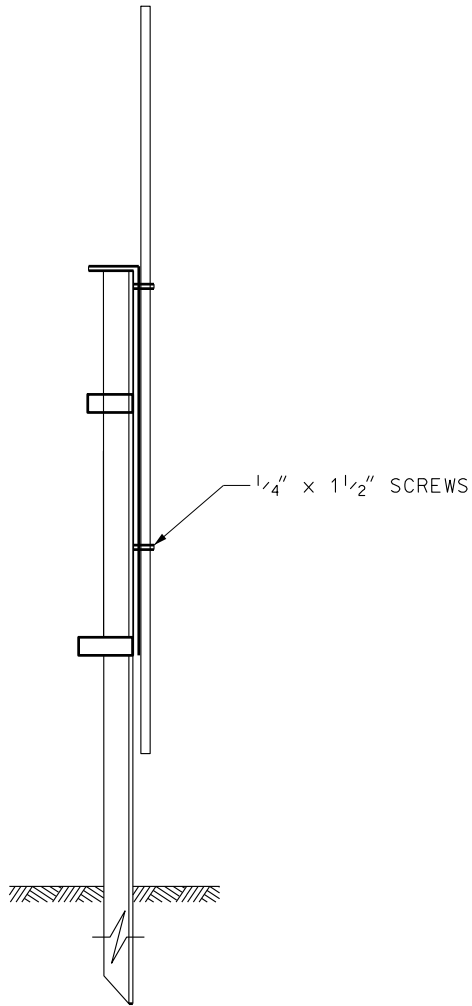
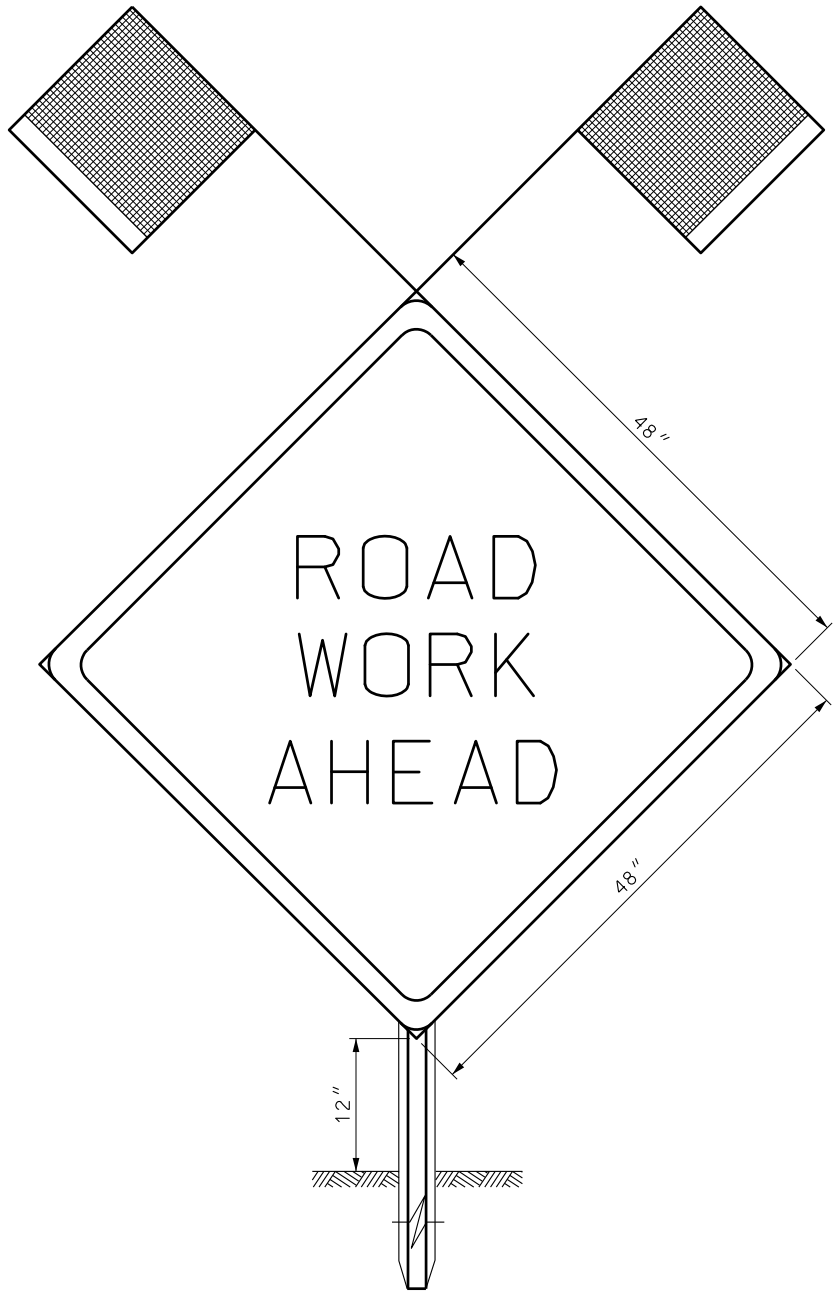


STRAIGHT
METAL DELINEATOR

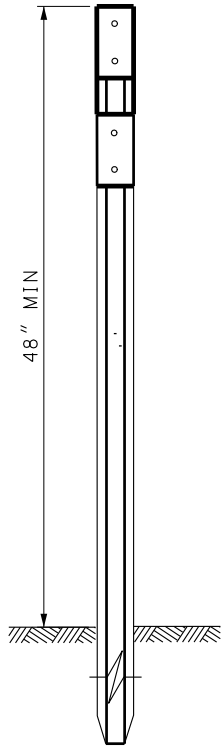

MOUNTED SIGN
BRACKET

NOTES:

1. USE DURING DAYLIGHT PERIOD ONLY.
2. REMOVE BRACKET AND SIGN PRIOR TO NIGHTTIME.
3. USE ON METAL DELINEATOR POST ONLY.
4. USE ASTM A 36 STEEL FOR BRACKET. WELD SQUARE LOOPS ONTO VERTICAL METAL PIECE. PAINT OR GALVANIZE SIGN BRACKET AFTER WELDING IS COMPLETED.
5. USE SCREWS TO ATTACH TRAFFIC CONTROL SIGN TO BRACKET THROUGH THE TWO 5/16" HOLES.

SUPPLEMENTAL DRAWING

UTAH DEPARTMENT OF TRANSPORTATION

STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION

SALT LAKE COUNTY

RECOMMENDED FOR APPROVAL

CHAIRMAN STANDARDS COMMITTEE

APPROVED

DEPUTY DIRECTOR

DELINEATOR MOUNTED
WORK ZONE
SIGN BRACKET

STANDARD DRAWING TITLE

REVISIONS

1 04/26/07 JL NEW DRAWING.

REMARKS